


HEATER BANK FAILURE CARD DATASHEET



INNOVATE
SOLUTIONS


MODEL : HFC10/15

PAGE 1 OF 3

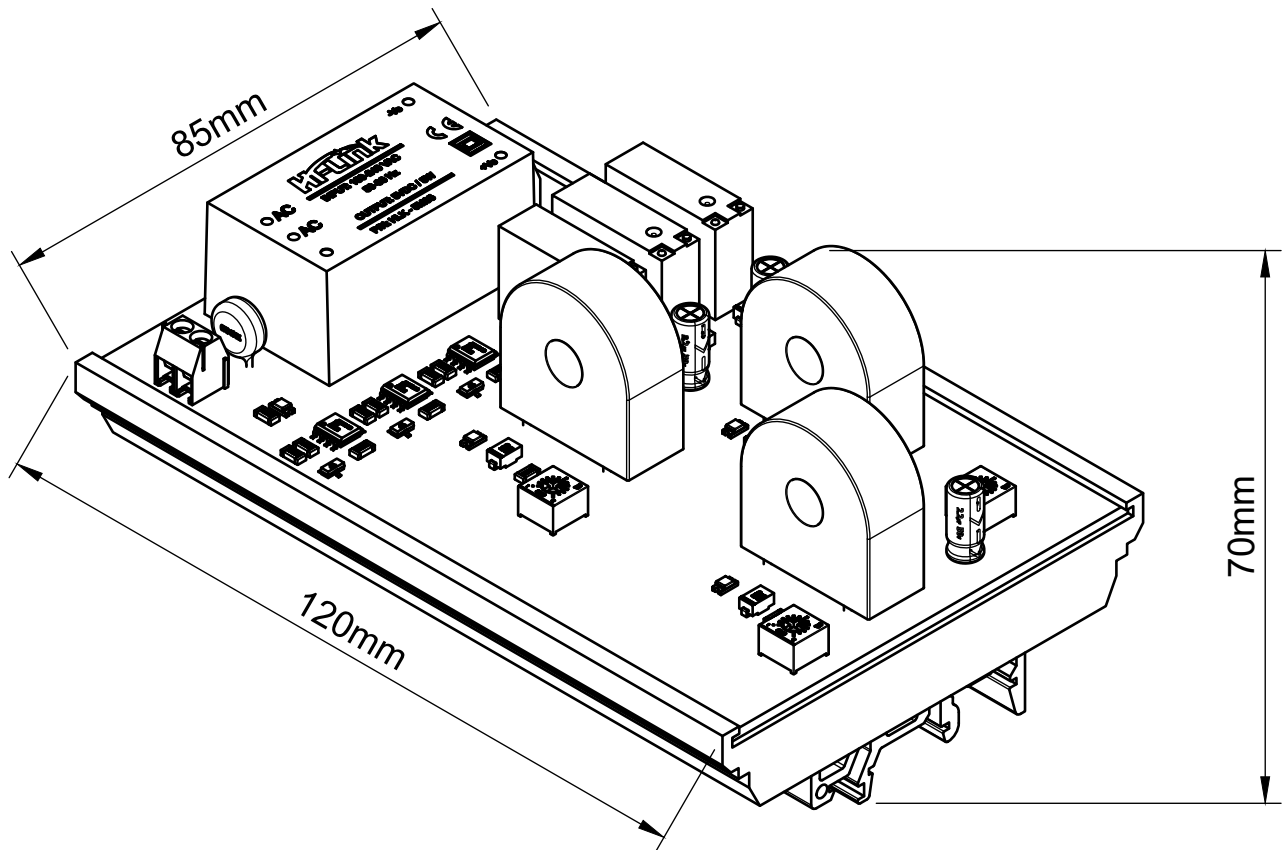

MODLE NO	HFC10 / HFC15
SUPPLY VOLTAGE	230V, 50 / 60 HZ
AMPERE RATING	10/15 amps per phase
OUTPUT	Potential free output
OUTPUT STATUS	NO = Heater not ok, NC = Heater ok
POWER INDICATION	YES (green LED)
HEATER STATUS INDICATION	YES (R,Y,B individual indication)
CURRENT CALIBRATION	Trimmer pot for each phase
MOUNTING	DIN Rail mounting provision
SIZE	120mm (L) X 90mm (W) X 70mm (H)
PCB MOC	FR4 material meets UL94V-0 standards
CT ACCURACY	Class 1 accuracy +/- 3%

HEATER BANK FAILURE CARD DATASHEET

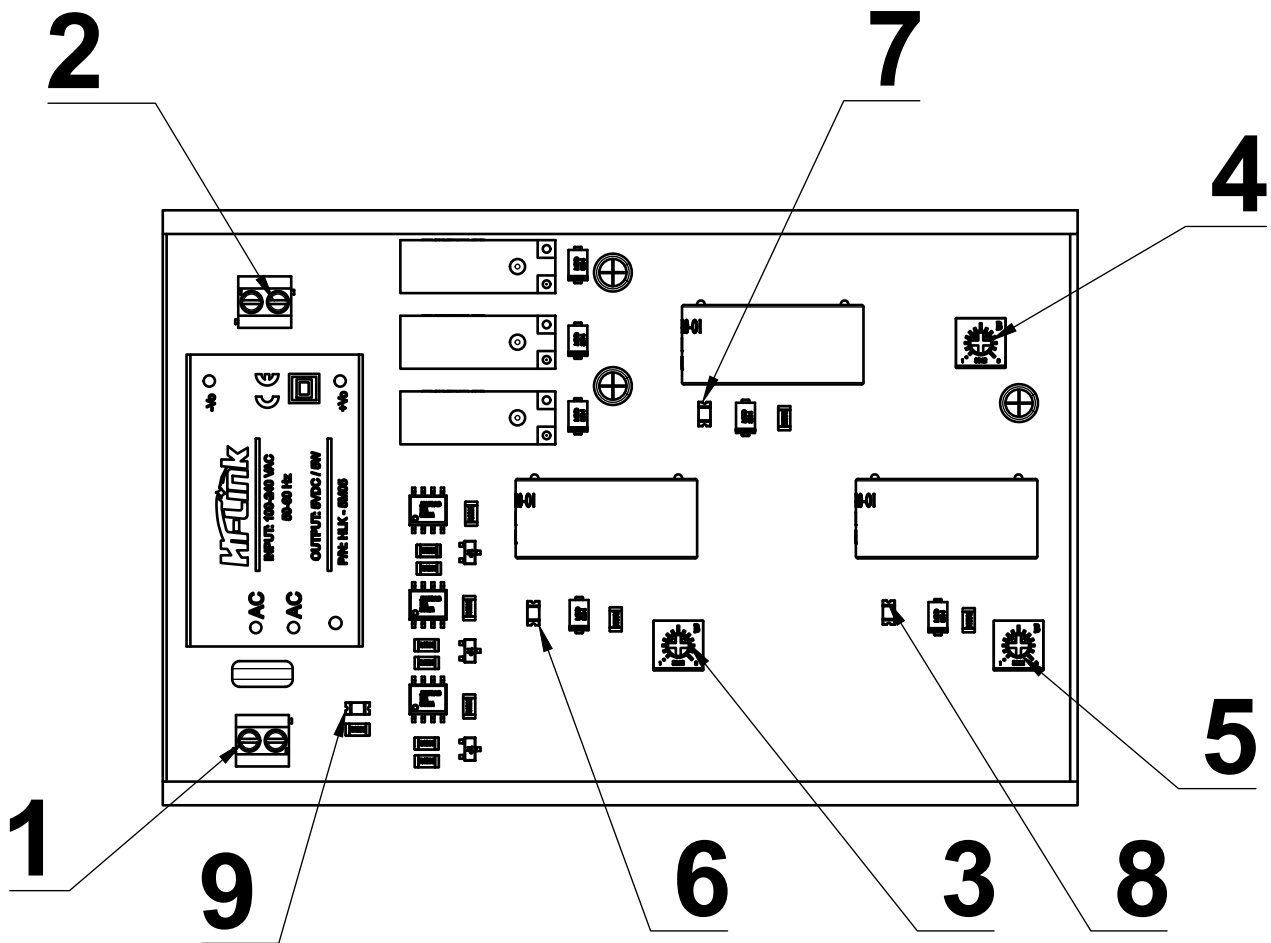

HEATER BANK FAILURE CARD PART IDENTIFICATION

1	230V 50 / 60 HZ power supply input terminal
2	Potential free output terminal
3	Trimmer pot for R phase trigger setting
4	Trimmer pot for Y phase trigger setting
5	Trimmer pot for B phase trigger setting
6	R phase heater indication (LED ON = Heater ok)
7	Y phase heater indication (LED ON = Heater ok)
8	B phase heater indication (LED ON = Heater ok)
9	Card power ON indication

HEATER BANK FAILURE CARD DATASHEET




INNOVATE
SOLUTIONS

MODEL : HFC10/15

PAGE 3 OF 3

POTENTIAL
FREE
CONTACT

LINE

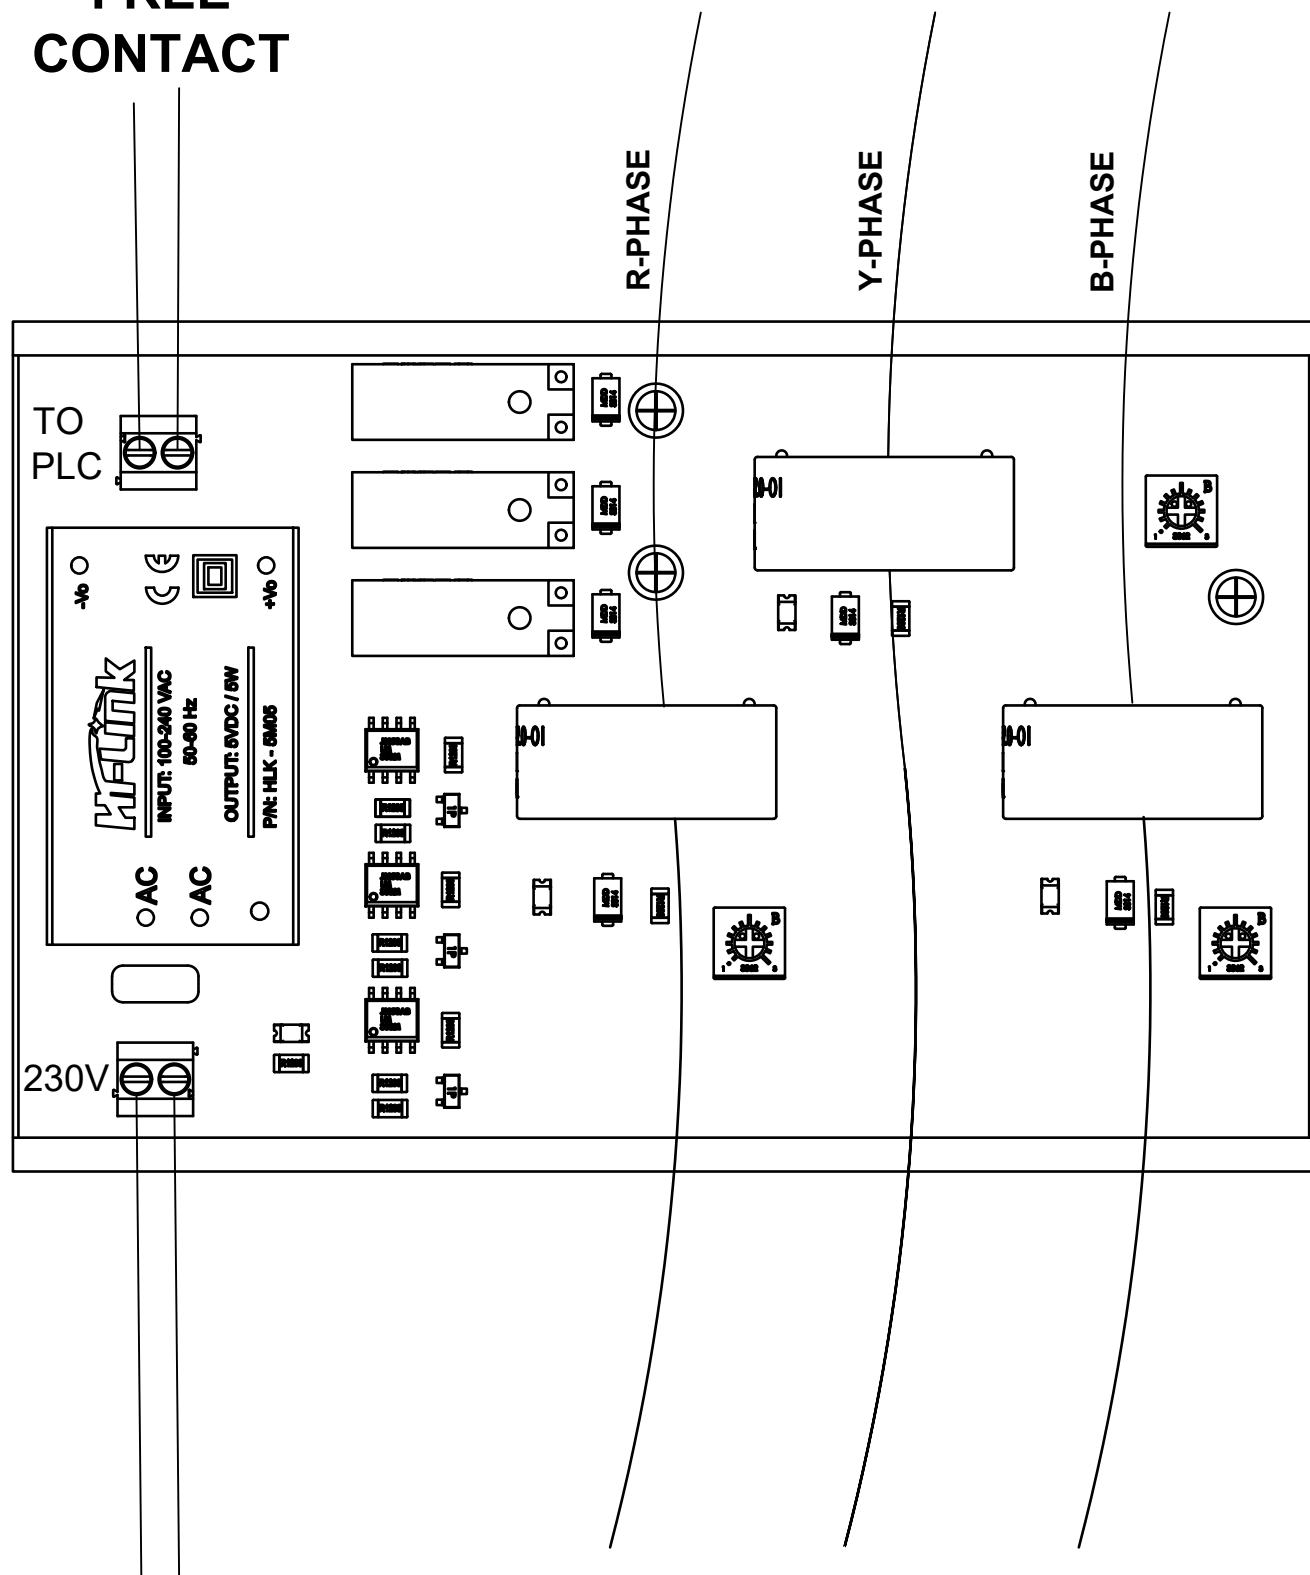

230V 50 / 60 HZ
SUPPLY

LOAD





